

# ITT

Wastewater

## Goulds Pumps

PV Submersible Vortex  
Sewage Pump



### FEATURES

---


- Corrosion resistant construction.
- Cast iron body.
- Thermoplastic impeller and cover.
- Upper sleeve and lower heavy duty ball bearing construction.
- Motor is permanently lubricated for extended service life.
- Powered for continuous operation.
- Vortex impeller is recessed to allow free flow through casing.
- All ratings are within the working limits of the motor.
- Replaceable power cord, 10' and 20' standard lengths, heavy duty 16/3 SJTW with NEMA three prong, 115 or 230 volt grounding plug.
- Complete unit is heavy duty, portable and compact.
- Mechanical seal is carbon, ceramic, BUNA and stainless steel.
- Stainless steel fasteners.



Goulds Pumps is a brand of ITT Water Technology, Inc.  
- a subsidiary of ITT Industries, Inc.

[www.goulds.com](http://www.goulds.com)

*Engineered for life*



# ITT

## GOULDS PUMPS Wastewater

### APPLICATIONS

Specially designed for the following uses:

- Residential sewage systems
- Heavy duty sump/dewatering
- Water transfer

### SPECIFICATIONS

#### Pump

- Discharge: 2" NPT
- Maximum capacity: 100 GPM
- Maximum head: 22' TDH
- Vortex Impeller
- Solids handling: 2" maximum sphere.
- Temperature: 104°F (40°C) maximum, continuous when fully submerged.
- Automatic models include a float switch.
- Manual models available.
- Pumping range: see performance chart or curve.

### MOTOR

- Single phase
- 60 Hertz
- 115 and 230 volt
- Built-in thermal overload protection with automatic reset.
- Class B insulation.
- Oil-filled design.
- High strength carbon steel shaft.

#### PV5 Motor:

- .50 HP, 3400 RPM
- PSC design

### AGENCY LISTINGS




Tested to UL 778 and  
CSA 22.2 108 Standards  
By Canadian Standards Association  
File #LR38549

Goulds Pumps is ISO 9001 Registered.

### MODEL INFORMATION

| Order No. | HP | Volts | Amps | Minimum Circuit Breaker | Phase | RPM  | Float Switch Style   | Power Cord Length | Discharge Connection | Maximum Solids Size | Minimum Basin Diameter | Shipping Weight lbs/kg |
|-----------|----|-------|------|-------------------------|-------|------|----------------------|-------------------|----------------------|---------------------|------------------------|------------------------|
| PV51M     | ½  | 115   | 13.0 | 20                      | 1     | 3450 | Plug / No Switch     | 10'               | 2"                   | 2"                  | 18"                    | 40                     |
| PV51P1    |    |       |      |                         |       |      | Piggyback Wide Angle | 10'               |                      |                     |                        | 42                     |
| PV51MF    |    | 230   | 6.5  | 15                      |       |      | Plug / No Switch     | 20'               |                      |                     |                        | 42                     |
| PV52MF    |    |       |      |                         |       |      | Plug / No Switch     | 20'               |                      |                     |                        | 42                     |
| PV51P1F   |    | 115   | 13.0 | 20                      |       |      | Piggyback Wide Angle | 20'               |                      |                     |                        | 44                     |
| PV52P1F   |    | 230   | 6.5  | 15                      |       |      | Piggyback Wide Angle | 20                |                      |                     |                        | 44                     |




**ITT**


**GOULDS PUMPS**  
Wastewater

**PERFORMANCE CHARTS**

These charts show actual system performance with friction loss factored in for various discharge pipe lengths. Calculations and performance based on a system with 2" PVC, schedule 40 plastic pipe (C150), (4) 90° elbows, (1) check valve and (1) shut-off valve. Wastewater requires a minimum scouring velocity of 21gpm for 2" pipe. Shaded areas do not provide min. scouring velocity - use only for gray water with no solids.

| Pipe Length<br>(Feet) | GPM                  |    |    |    |    |    |    |    |    |    |
|-----------------------|----------------------|----|----|----|----|----|----|----|----|----|
|                       | Vertical Head (Feet) |    |    |    |    |    |    |    |    |    |
|                       | 2                    | 4  | 6  | 8  | 10 | 12 | 14 | 16 | 18 | 20 |
| 25                    | 95                   | 89 | 83 | 77 | 70 | 62 | 53 | 45 | 35 | 22 |
| 50                    | 83                   | 78 | 73 | 67 | 61 | 55 | 48 | 40 | 31 | 20 |
| 75                    | 76                   | 71 | 66 | 61 | 55 | 50 | 43 | 37 | 28 | 18 |
| 100                   | 69                   | 65 | 61 | 56 | 51 | 46 | 40 | 33 | 26 | 17 |
| 150                   | 60                   | 57 | 53 | 49 | 45 | 40 | 35 | 29 | 23 | 16 |
| 200                   | 54                   | 51 | 48 | 44 | 40 | 36 | 32 | 27 | 21 | 14 |
| 250                   | 49                   | 47 | 44 | 40 | 37 | 33 | 29 | 24 | 19 | 13 |
| 300                   | 46                   | 43 | 40 | 37 | 34 | 31 | 27 | 23 | 18 | 12 |

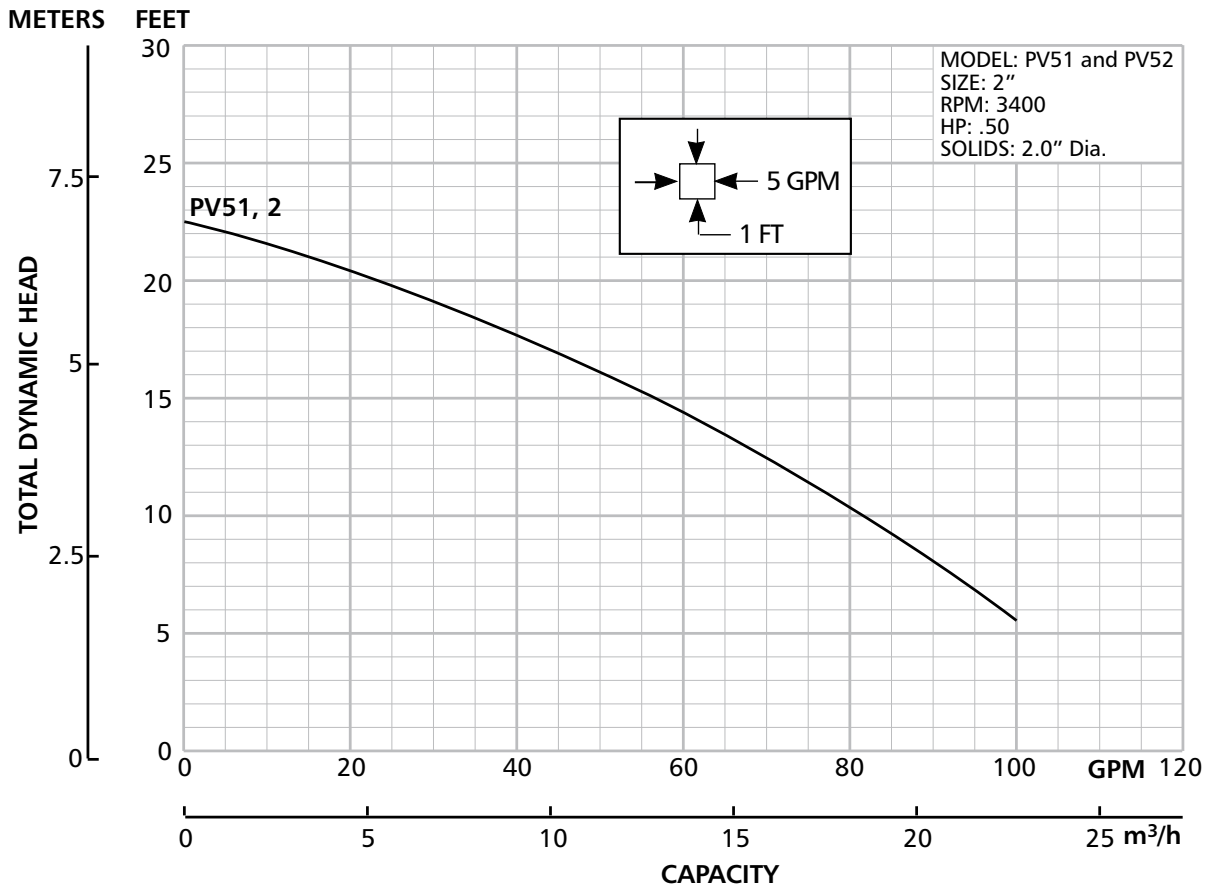






# ITT

## Wastewater

### DIMENSIONS

(All dimensions are in inches. Do not use for construction purposes.)

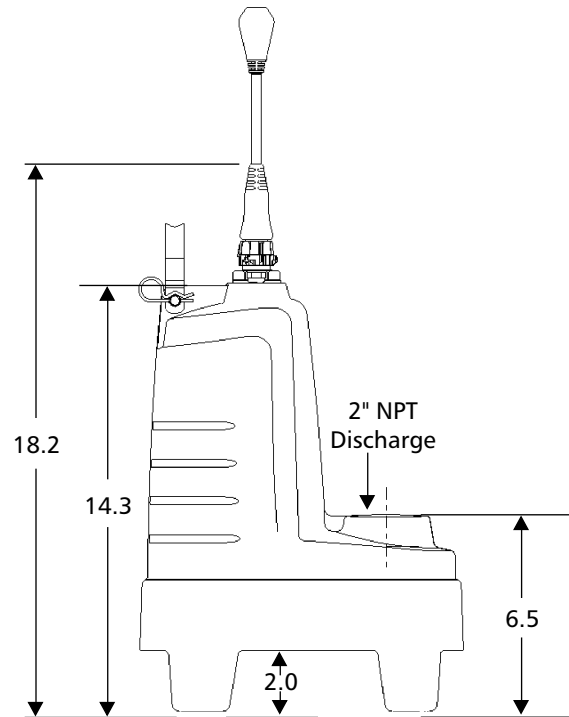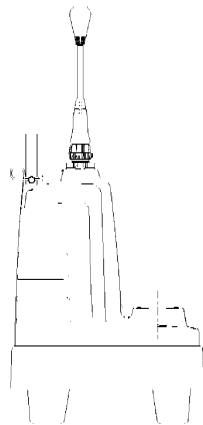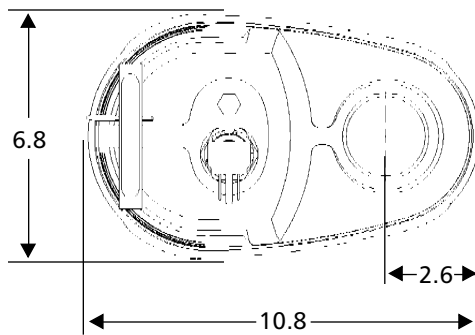

Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Industries Inc.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

**BPV March, 2006**

© 2006 ITT Water Technology, Inc.

*Engineered for life*