

750 Gallon Lowboy Lift Station

Weight: 8,400 lbs.
Item # 1790

General Notes

Concrete Specifications:


- 1) 4000 psi after 28 days with 4%-6% air
- 2) Reinforcing is grade 60
- 3) Cover over pump chamber is not designed for vehicle loads.
- 4) All joints sealed with butyl rubber joint sealant

Septic Tank Information:


- 1) Tanks should be pumped every 3-5 years
- 2) Center access cover and pump chamber cover should have risers to bring cover access close to grade.

Pump System Information:

- 1) Pumps are warranted for one year from date of installation.
- 2) System includes ACI Alarm Panel for mounting inside building.
- 3) Available with longer cable. Please specify length when ordering.

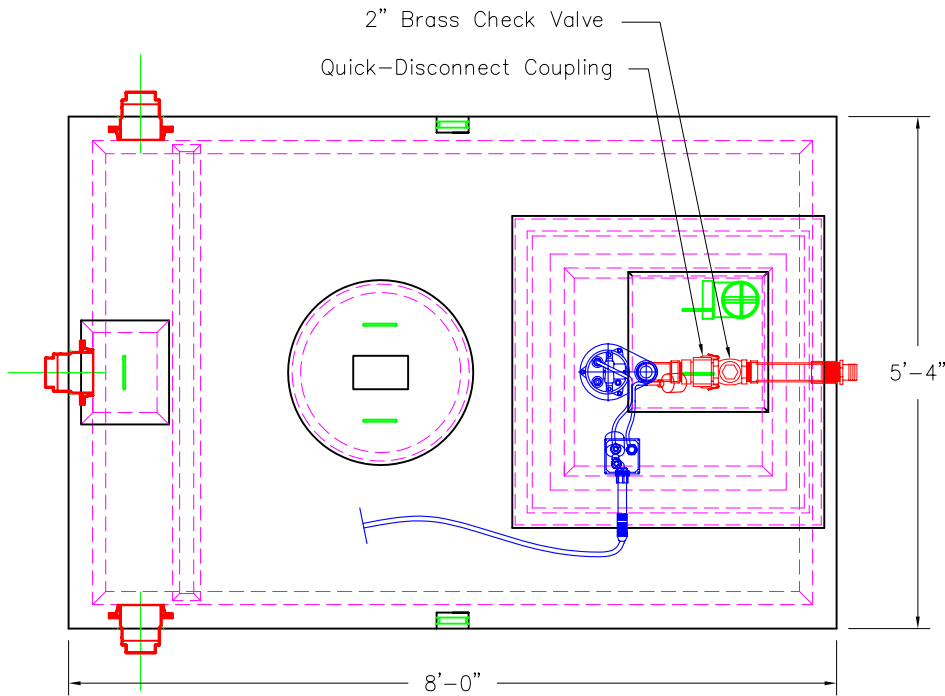

Plan View

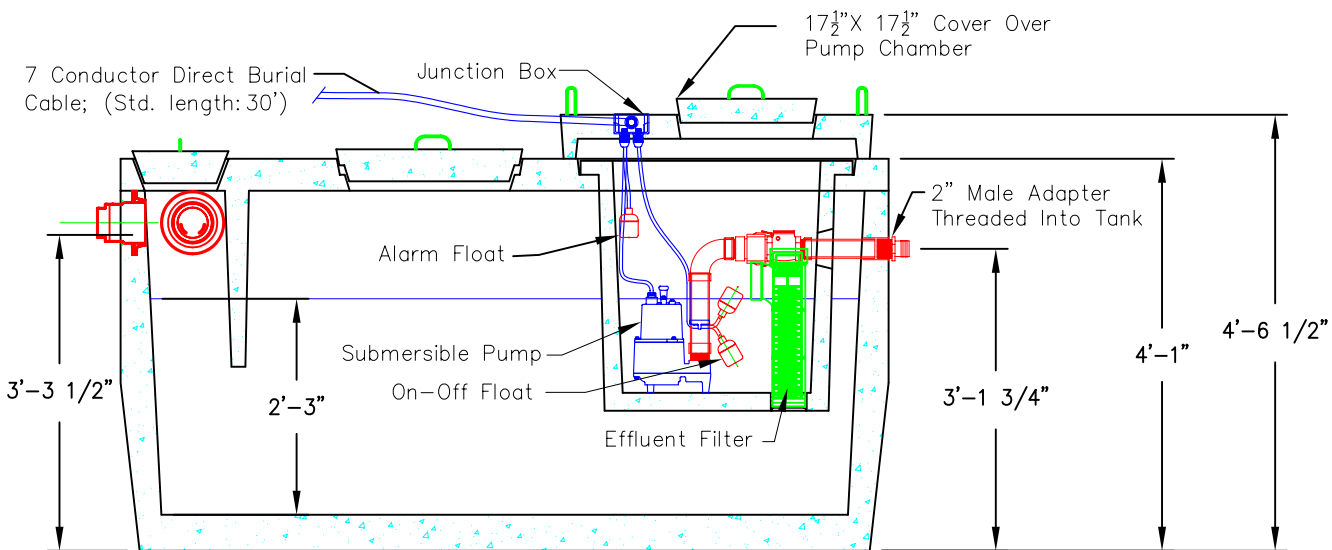

Section View

Model# w/Specified Pump	
Pump	Item#:
Goulds PE51M	1790
Goulds WE0511HH	1792
Goulds WE0512HH	1793
Goulds WE1012H	1794



American Concrete Industries

1022 Minot Ave. Auburn, ME / 1717 Stillwater Ave. Veazie, ME
Tel: 207-784-1388 / Tel: 207-947-8334

Last Revised:
01/06

PG. XXX