1000 Gallon 2 Comp. Grease Trap

Weight: 9,200 lbs.
Item # 8827

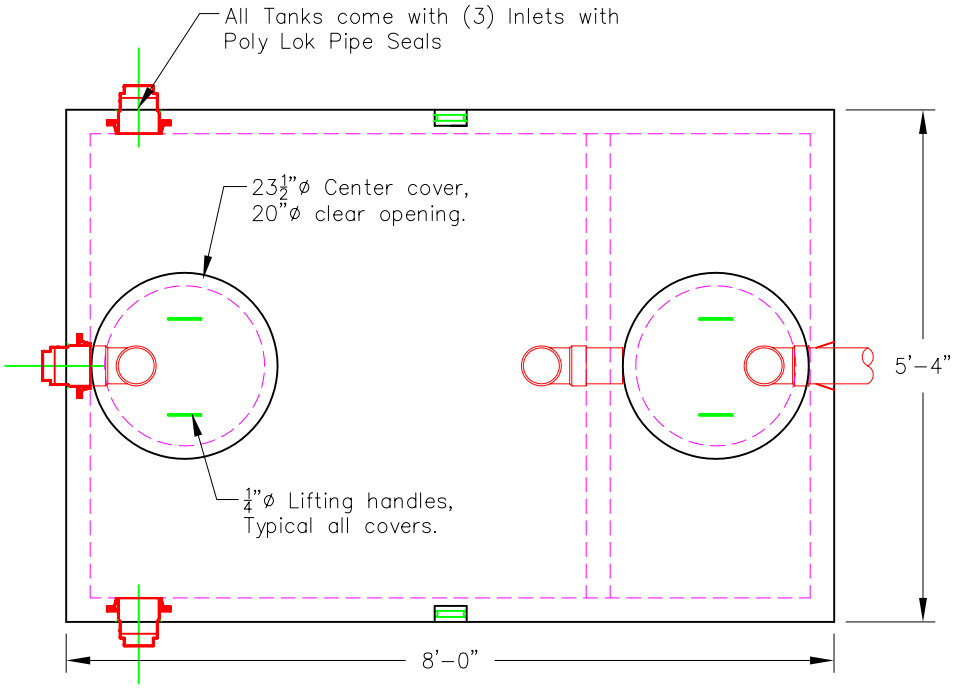

Plan View

General Notes:

Concrete Specifications:

1) 4000 psi @ 28 Days
2) 4%-6% Entrained Air
3) Tank Penetrations are integrally cast
4) All joints sealed with butyl rubber joint sealant

Grease Trap Information:

1) Tanks Should be pumped as needed
2) Access covers should have risers to bring cover access to grade.
3) Tanks can be vacuum tested at an additional cost

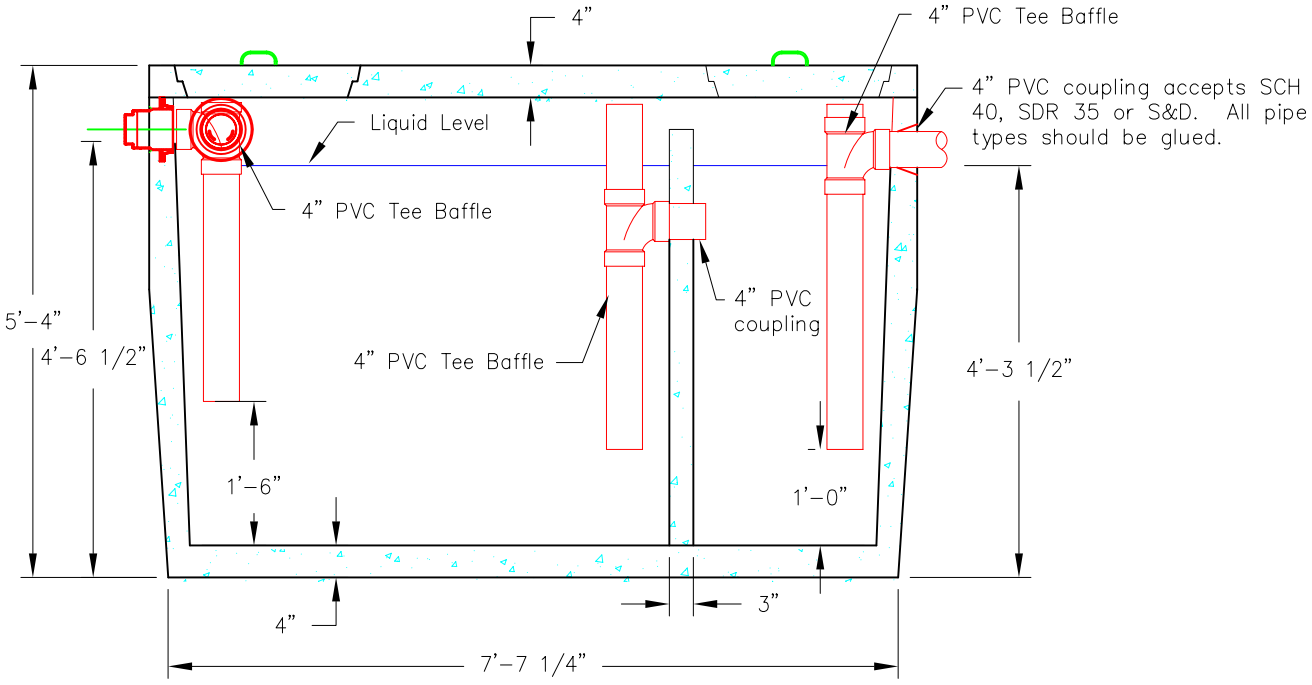

Section View

American Concrete Industries
1022 Minot Ave. Auburn, ME / 1717 Stillwater Ave. Veazie, ME
Tel: 207-784-1388 / Tel: 207-947-8334

Last Revised: 01/06

PG. XXX