


1500 Gallon 2 Comp. Grease Trap

Weight: 12,000 lbs.

Item # 8846

All Tanks come with (3) Inlets with RubberPoly Lok Pipe Seals

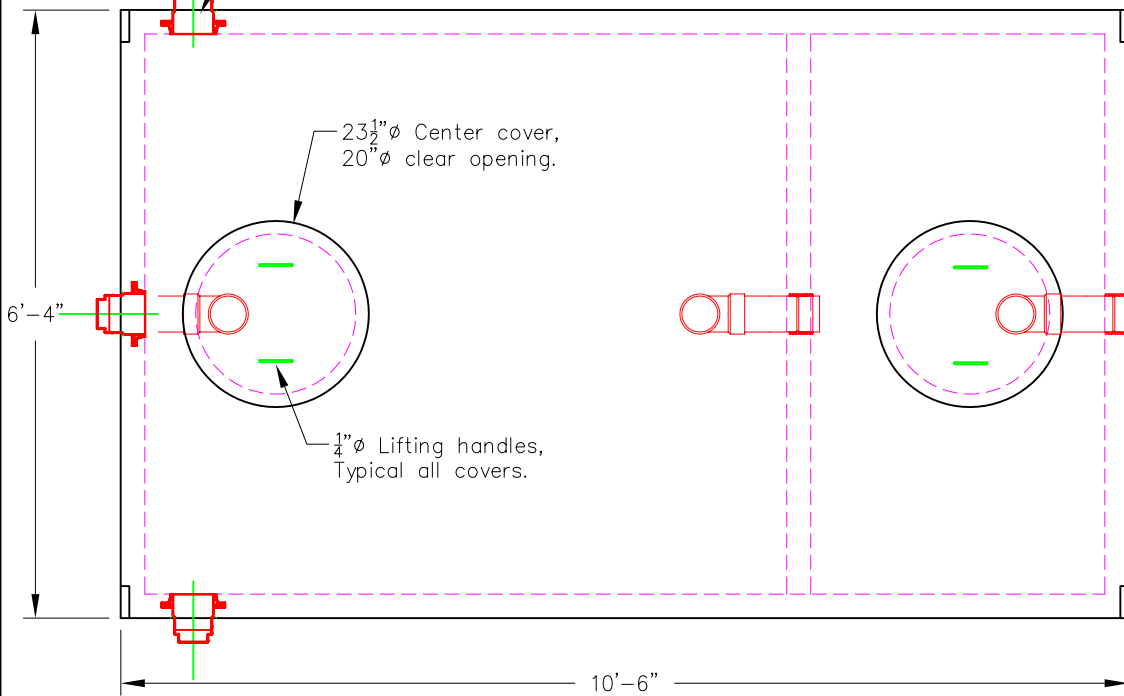

Plan View


General Notes:

Concrete Specifications:

- 1) 4000 psi @ 28 Days
- 2) 4%-6% Entrained Air
- 3) Tank Penetrations are integrally cast
- 4) All joints sealed with butyl rubber joint sealant

Grease Trap Information:

- 1) Tanks Should be pumped as needed
- 2) Access covers should have risers to bring cover access to grade.
- 3) Tanks can be vacuum tested at an additional cost

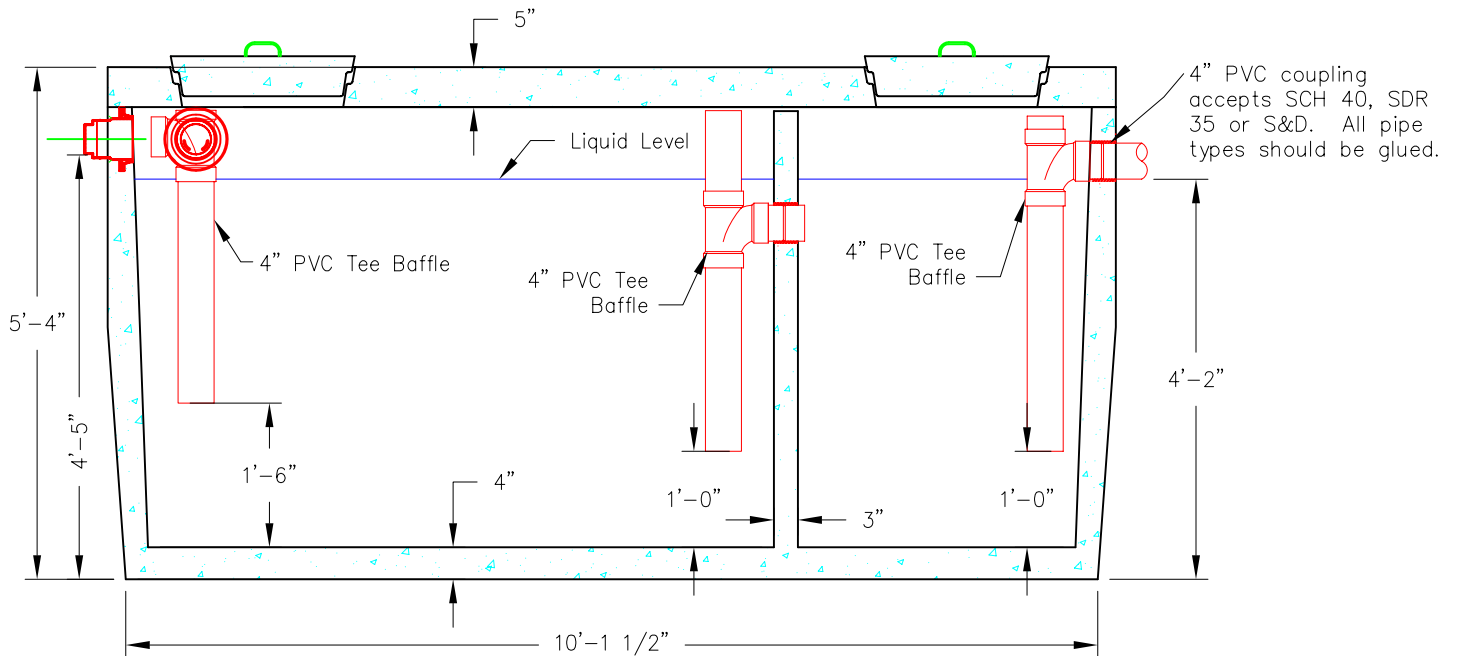

Section View



American Concrete Industries

2022 Minot Ave. Auburn, ME / 1717 Stillwater Ave. Veazie, ME
Tel: 207-784-1388 / Tel: 207-947-8334

Last Revised:
01/06

PG. XXX