



American Concrete Industries


6'Ø Manhole

ACI Catalog 2012


Commercial / Manhole / 6 FT

GENERAL SPECIFICATIONS:


- 1) CONCRETE 5000 PSI AFTER 28 DAYS
- 2) DESIGNED FOR H-20 WHEEL LOADING
- 3) CONFORMS TO ASTM-C478 SPECIFICATIONS WITH ACCORDANCE TO THE MDOT
- 4) REINFORCED TO 0.18 IN²/L.F
- 5) MANHOLE JOINTS SEALED W/ (2) STRIPS OF BUTYL RUBBER

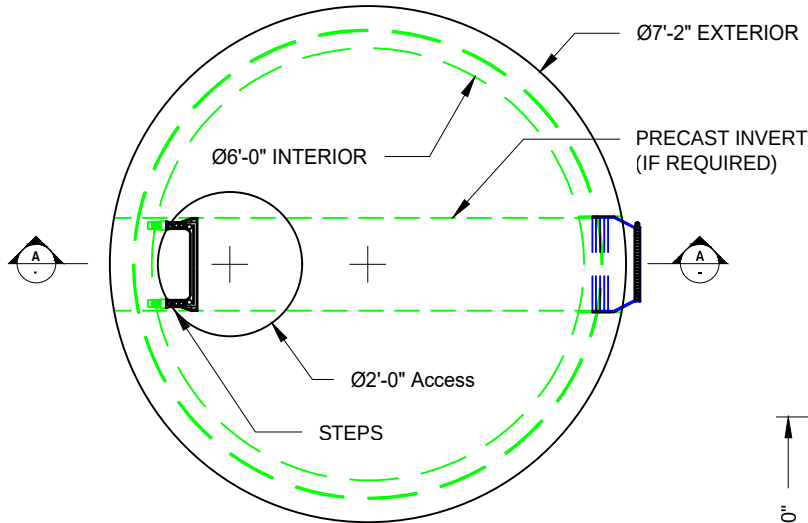

PLAN VIEW

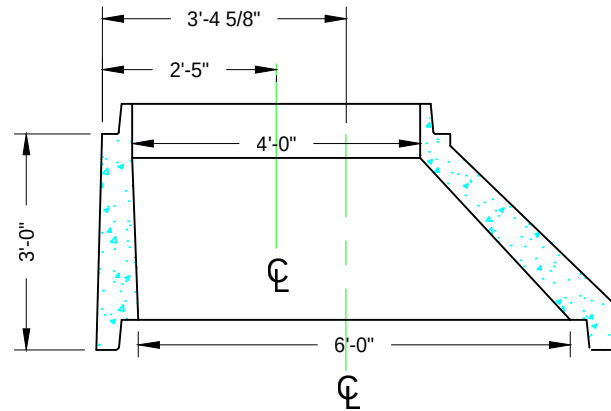

OPTIONAL 6'-4" x 3'H CONE

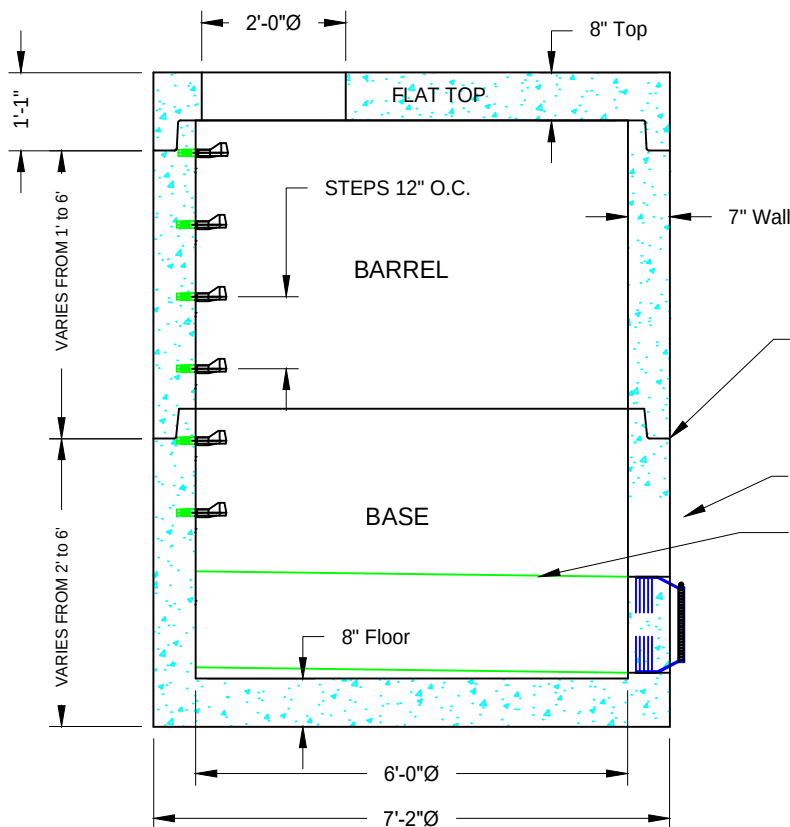

SECTION "A-A"

OPTIONS FOR MANHOLE:

- ☐ MANHOLE STEPS 12" O.C.
- ☐ 6'Ø TO 4'Ø TRANSITION CONE
- ☐ EXTERIOR DAMP-PROOFING
- ☐ PRECAST INVERTS

CONNECTOR TYPE:

- ☐ BOOTS
- ☐ LINK-SEALS

MANHOLE JOINTS SHOULD BE SEALED WITH (2) 1"Ø BUTYL RUBBER SEALANT STRIPS

FLEXIBLE CONNECTORS (RUBBER BOOTS)

PRECAST INVERT SLOPE: 1/4" PER FT

	APPROX. WEIGHTS (#)
Flat Top	4,425
Barrel	1,750 V.F.
Floor	2,049
Storage	211.4 GAL/FT

American Concrete Industries & Superior Concrete LLC

1717 Stillwater Ave
Veazie, ME 04401
Tel: 207-947-8334 / Fax: 207-947-8334

982 Minot Ave
Auburn, ME 04210
Tel: 207-784-1388 / Fax: 207-783-4039

Drawn By:

Drawn Date: 8/8/2000

Revision #: 0.03

Revision Date: 7/20/2015