



American Concrete Industries

8'Ø Manhole

ACI Catalog 2012

Commercial / Manhole / 8 FT

GENERAL SPECIFICATIONS:


- 1) CONCRETE 4000 PSI AFTER 28 DAYS
- 2) DESIGNED FOR H-20 WHEEL LOADING
- 3) CONFORMS TO ASTM-C478 SPECIFICATIONS, with regard to Maine DOT spec
- 4) barrel REINFORCED TO 0.24 IN²/L.F
- 5) MANHOLE JOINTS SEALED W/ (2) STRIPS OF BUTYL RUBBER

OPTIONS FOR MANHOLE:


- ☐ MANHOLE STEPS 12" O.C.
- ☐ EXTERIOR DAMP- PROOFING
- ☐ PRECAST INVERTS

CONNECTOR TYPE:

- ☐ BOOTS
- ☐ LINK-SEALS

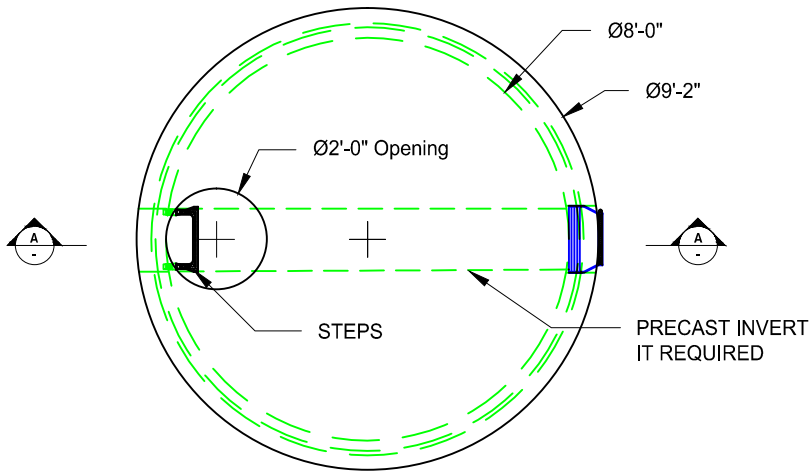

PLAN VIEW

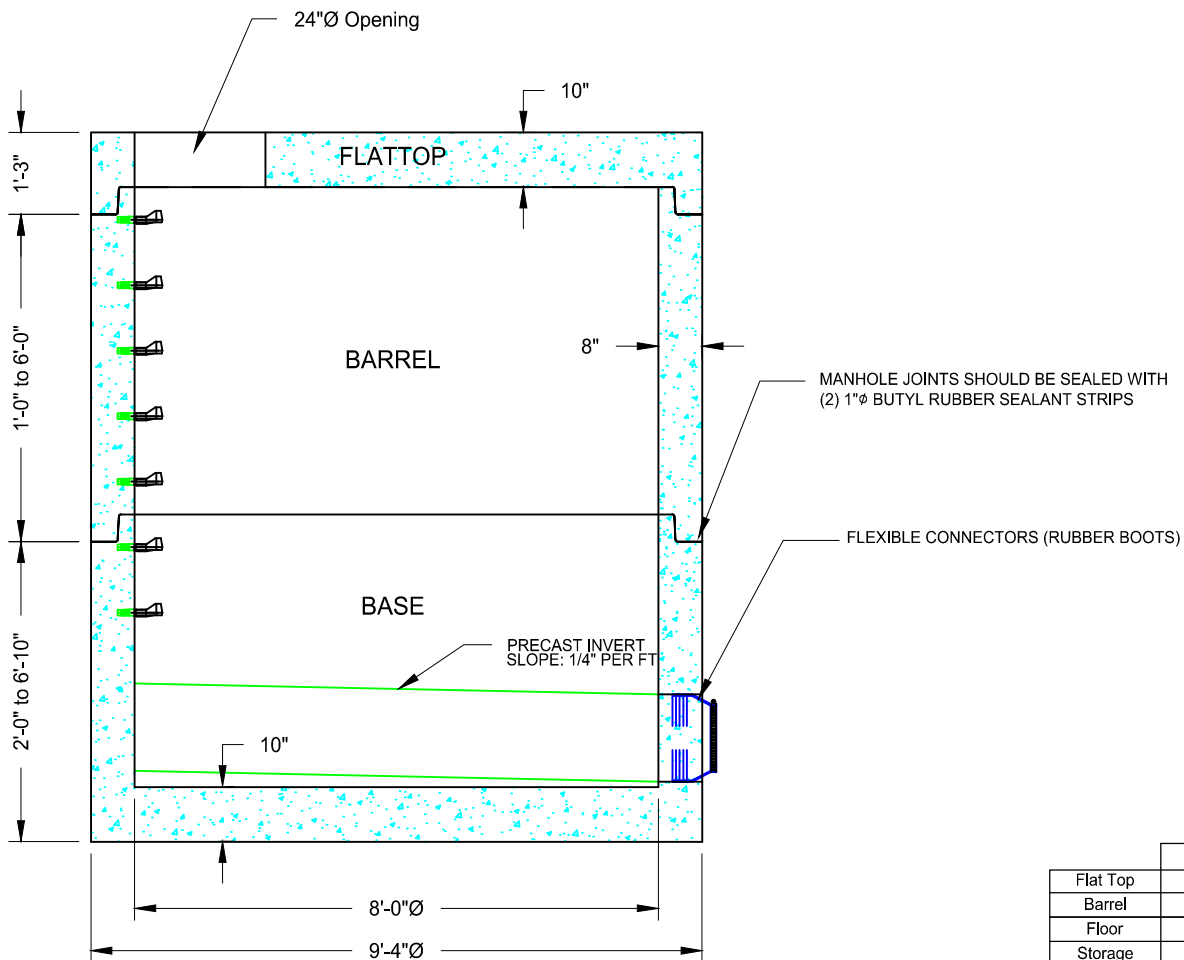

SECTION "A-A"

APPROX. WEIGHTS (#)	
Flat Top	8,600
Barrel	2,766 V.F.
Floor	7,009
Storage	375.9 GAL/FT

American Concrete Industries, Inc.

1717 Stillwater Ave.
Veazie, ME 04401
Tel: (207) 947-8334 | Fax: (207) 947-3580

982 Minot Ave
Auburn, ME 04210
Tel: (207) 784-1388 | Fax: (207) 783-4039

Drawn By:

Drawn Date: 6/4/2010

Revision #: 0.02

Revision Date: 5/20/2015