
# American Concrete Industries


## 22" x 32" Utility Trench

ACI Catalog 2013


Utilities Trenches | Item#

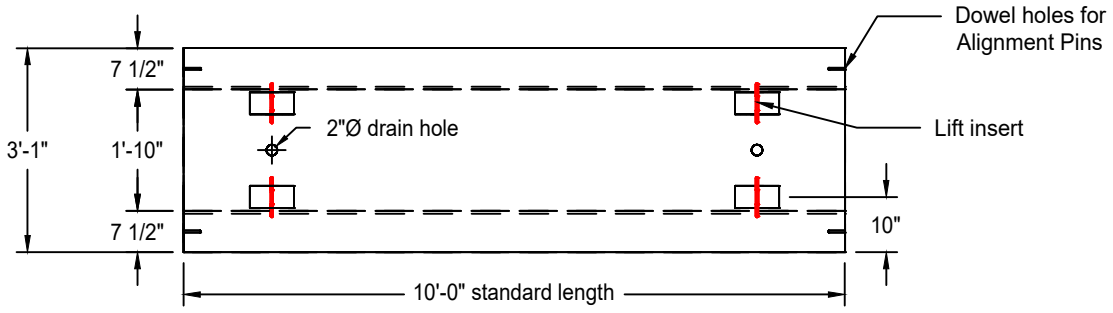



Plan View

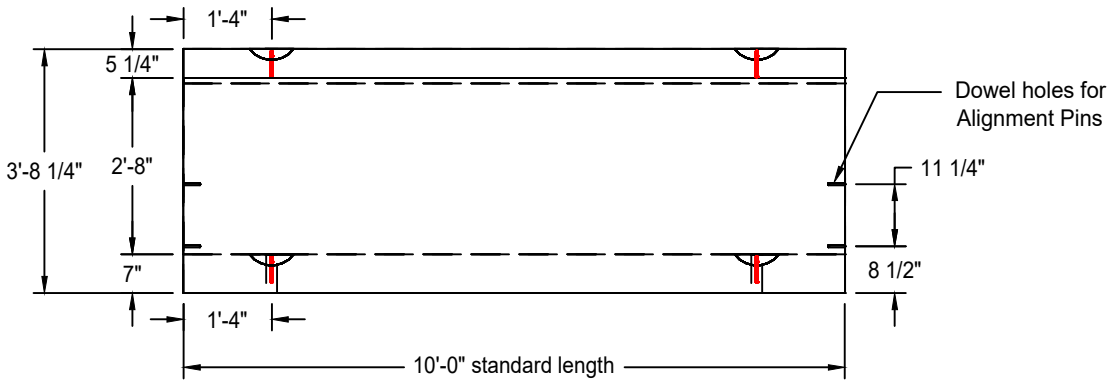


Elevation View

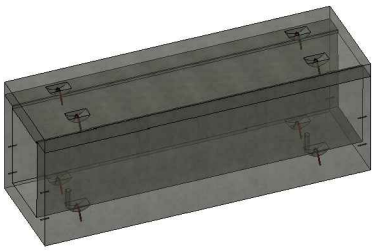

Conceptual View

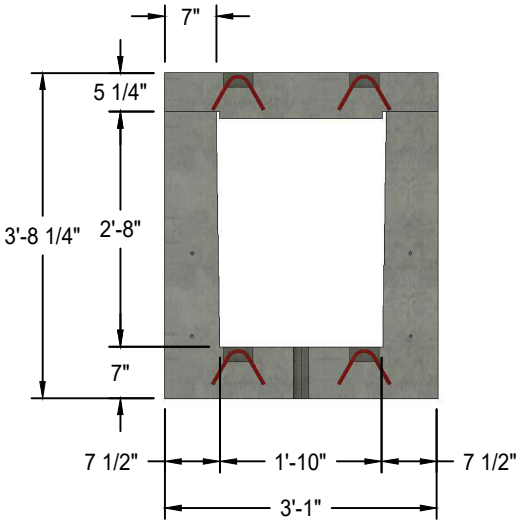


End View

Notes:

1) Concrete shall be 5,000 psi at 28 days, with 4-6% air
2) Reinforced for H-20 loading, Grade 60 steel
3) 4" & 2" duct knockouts & drain openings available, see sheet #V-D3 & V-D4
4) Special lengths, angled or tee sections available
5) End walls available, see sheet #V-D1
6) Maximum trench height shown, shorter heights available
7) Cover weight ≈ 2,200#, Trench weight ≈ 7,500#


www.americanconcrete.com
1717 Stillwater Ave.
Veazie, ME 04401
Tel: (207) 947-8334 | Fax: (207) 947-3580
1022 Minot Ave
Auburn, ME 04210
Tel: (207) 784-1388 | Fax: (207) 783-4039


Scale: 1/2" = 1'-0" Unless otherwise noted

Drawn Date: 7/22/2013 BRW

Revision #:

Revision Date: