American Concrete Industries

1,000 Gallon H-20 Single Comp. OWS/Grease Trap

WWW.AMERICANCONCRETE.COM
1717 Stillwater Ave.
Veazie, ME. 04401
Tel: (207) 947-8334
Fax: (207) 947-3580

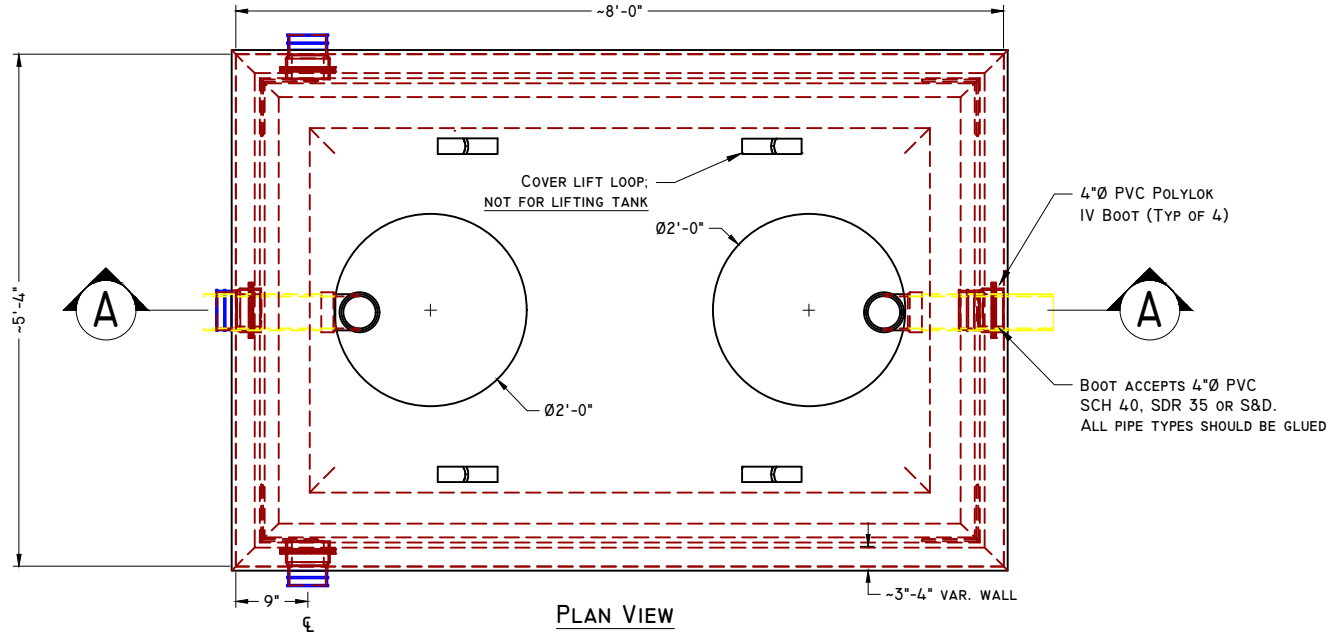

Plan View

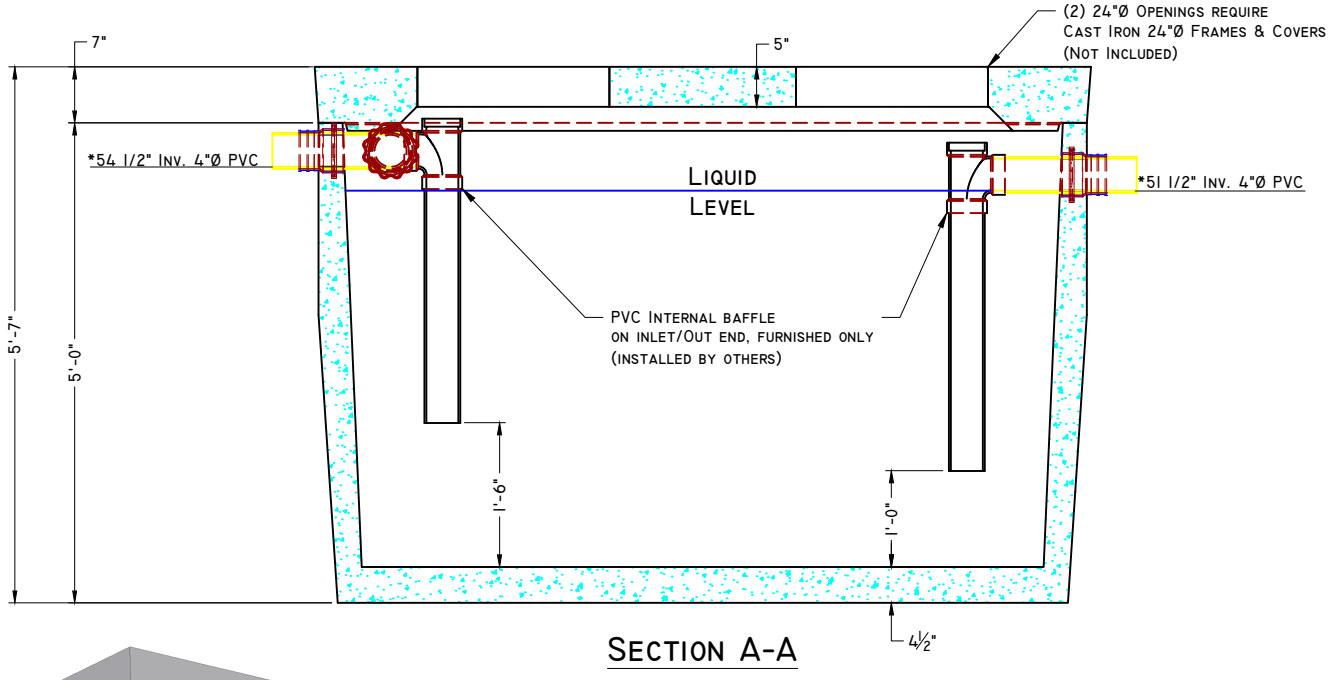

Section A-A

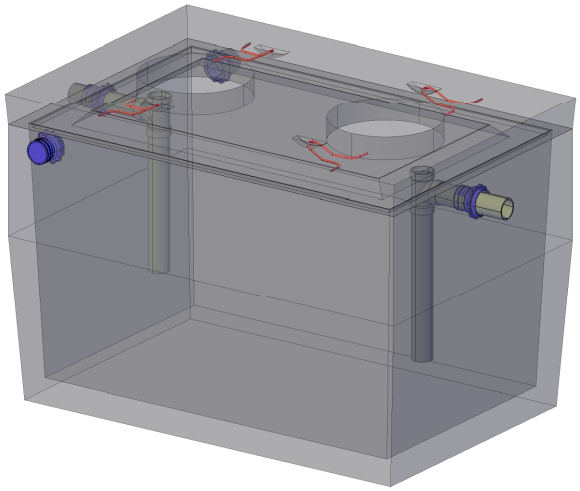

Conceptual View

Scale: NTS

*Dimension is taken from bottom of tank

Manufacturing Notes

1.1. Concrete Compressive Strength: 5000psi @ 28 Days
1.2. Air Entrainment: 4-6%
1.3. Grade 60 Reinforcement
1.4. Tanks should be pumped every annually, depending on use
1.5. NEVER use septic cleaning agents
1.6. Designed for H-20 Wheel Loading
1.7. All tank penetrations are integrally cast
1.8. All joints sealed W/ butyl rubber joint sealant

Physical Specifications:

Cover Weight:	3,000 lbs
Tank Weight:	7,335 lbs
Total Weight:	10,335 lbs
Max. Capacity:	1,164 gal
Oil/Grease Capacity:	741 gal
Working Capacity:	981 gal (4"Ø Outlet Invert)

Commercial | GT/OWS | 1000gal H-20 OWS/GT		Scale: 1/2" = 1'-0" Unless otherwise noted	Revision #:
American Concrete Industries Catalog	Item#	Drawn Date: 9/02/2021 OLM	Revision Date: