2000 Gallon Grease Trap

Weight: 14,900 lbs.
Item # 8850

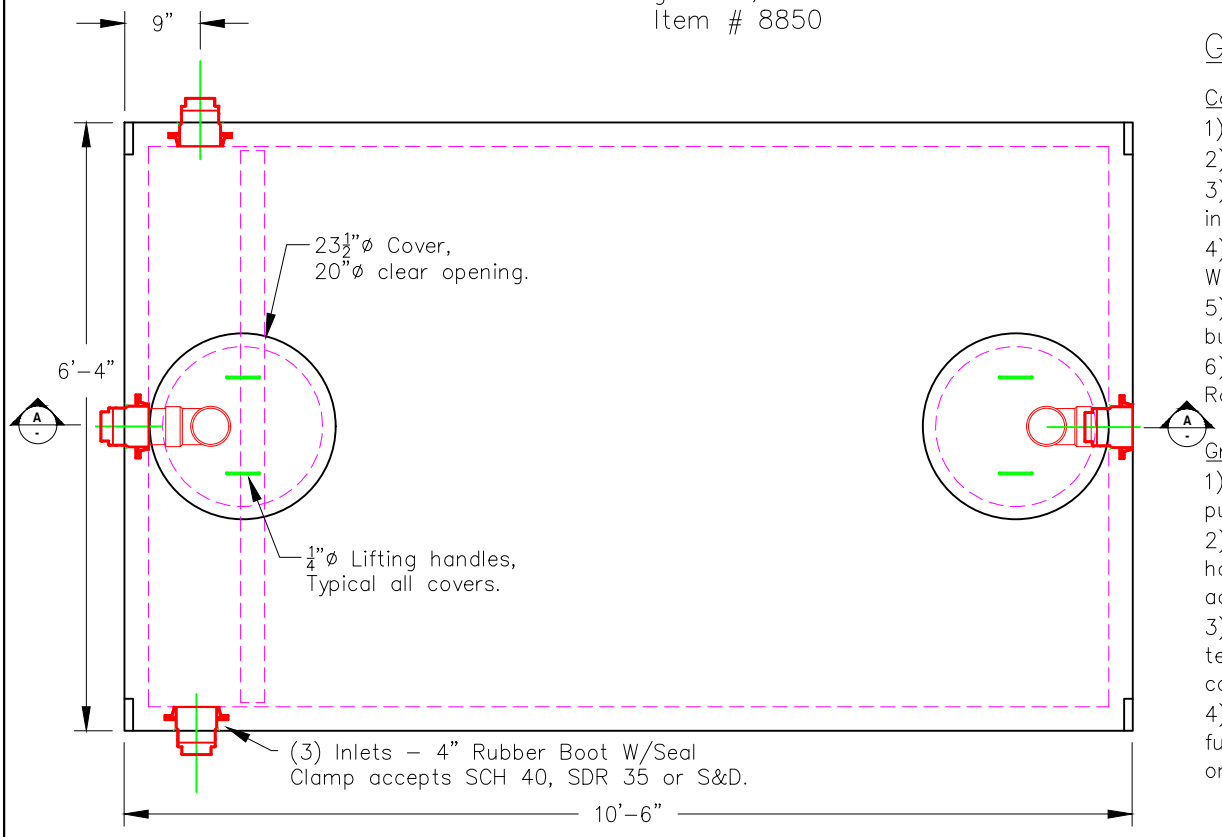

Plan View

General Notes:

Concrete Specifications:

1) 4000 psi @ 28 Days
2) 4%–6% Entrained Air
3) Tank Penetrations are integrally cast
4) Designed for HS–10 Wheel Loading
5) All joints sealed with butyl rubber joint sealant
6) Available in H–20 Load Rating

Grease Trap Information:

1) Tanks should be pumped as needed
2) Access covers should have risers to bring cover access to grade
3) Tanks can be vacuum tested at an additional cost
4) 4" PVC Tees, inlet tee furnished only, Assembled onsite by contractor

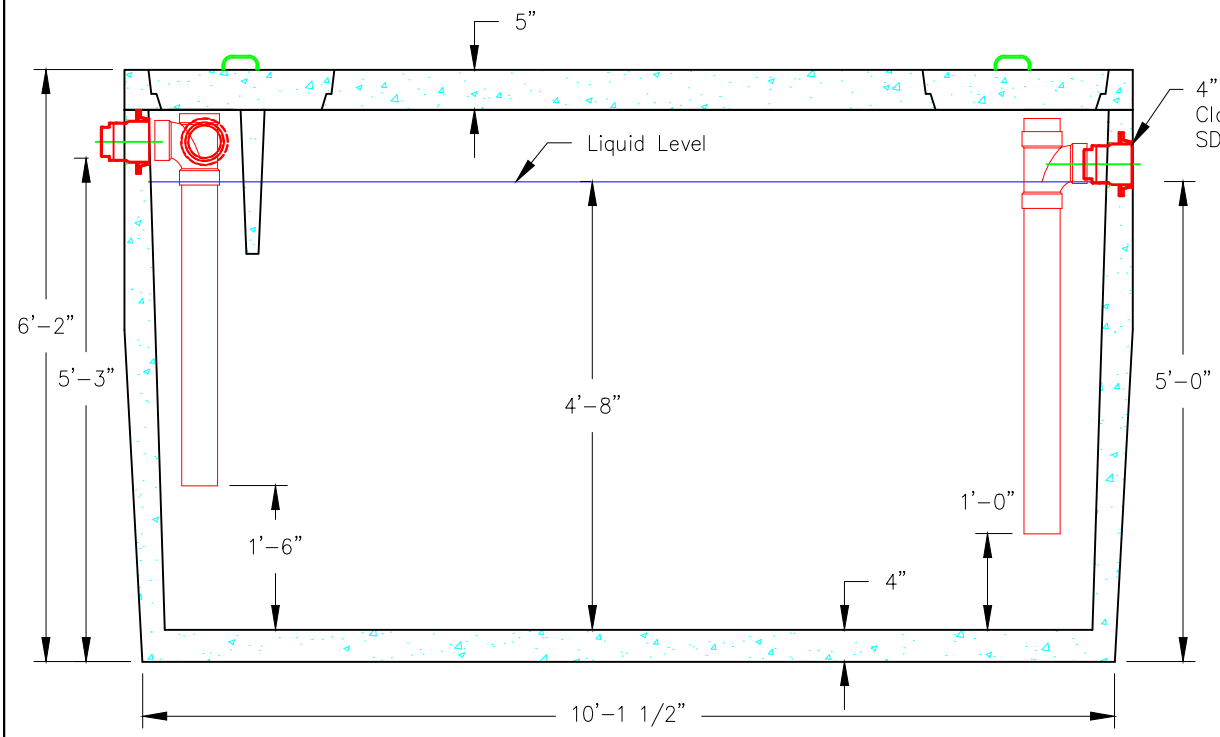

Section A–A

American Concrete Industries

1022 Minot Ave. Auburn, ME / 1717 Stillwater Ave. Veazie, ME
Tel: 207–784–1388 / Tel: 207–947–8334

Last Revised: 02/10

PG. IB7