American Concrete Industries

750 Gallon Regular Holding Tank

WWW.AMERICANCONCRETE.COM
1717 Stillwater Ave.
Veazie, ME. 04401
Tel: (207) 947-8334
Fax: (207) 947-3580

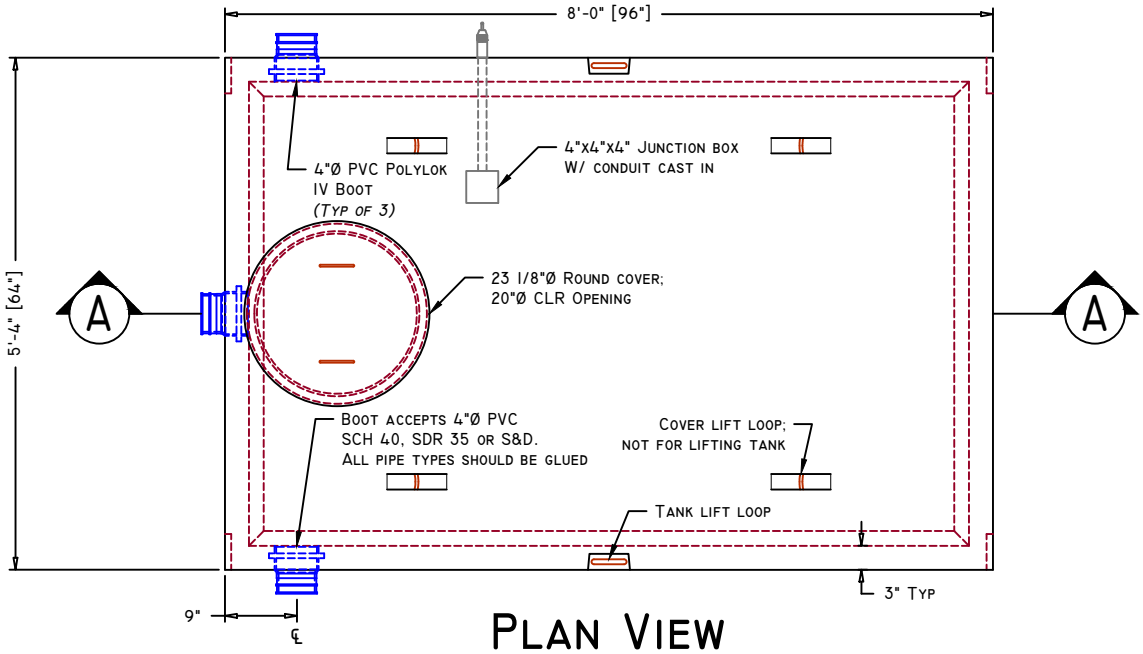

Plan View

*39 1/2" Inv. 4"Ø PVC

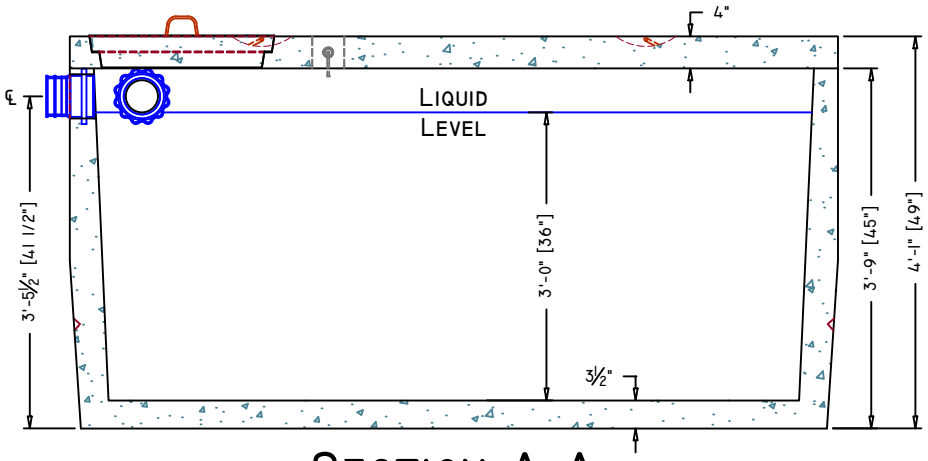

Section A-A

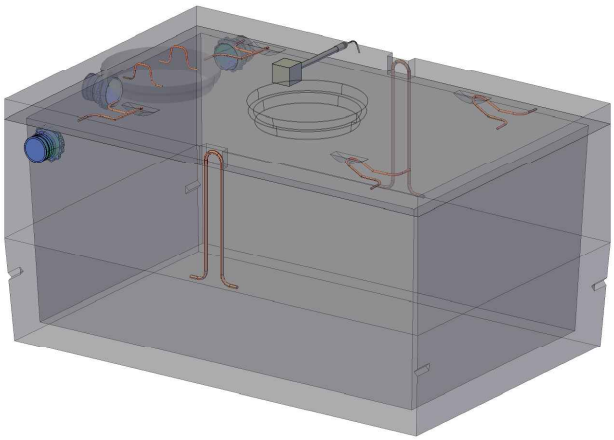

Conceptual View - NTS

*Dimension is taken from bottom of tank

Manufacturing Notes

- 1.1. Concrete Compressive Strength: 5000psi @ 28 Days
- 1.2. Air Entrainment: 4-6%
- 1.3. Grade 60 Reinforcement
- 1.4. Structural fiber reinforced base
- 1.5. Tanks should be pumped every 3-5 years, depending on use
- 1.6. NEVER use septic cleaning agents
- 1.7. Designed for pedestrian load rating only
  - 1.7.1. Specify H20 for burial depths > 3'-6"
- 1.8. All tank penetrations are integrally cast
- 1.9. All joints sealed w/ butyl rubber joint sealant

Physical Specifications:

Cover Weight:	**2,120 lbs**
Tank Weight:	**5,745 lbs**
Total Weight:	**8,315 lbs**
Available Capacity:	**890 gal (max)**
Working Capacity:	**767 gal (4"Ø PVC)**

Residential | Holding tanks | 750gal	Scale: 1/2" = 1'-0" Unless otherwise noted	Revision #:
American Concrete Industries Catalog Item#	Drawn Date: 10/26/2015 SSM	Revision Date: