American Concrete Industries


18"Ø Light Pole w/ 30" Sq. Base

18"Ø Light Pole w/ 30" Sq. Base x __ Ft. __ In. High


Std. Drawings: Utility\LPB\18in | Item#:

Ht.: 4'-0"	Ht.: 4'-6"	Ht.: 5'-0"	Ht.: 5'-6"	Ht.: 6'-0"	Ht.: 6'-6"	Ht.: 7'-0"	Ht.: 7'-6"	Ht.: 7'-9"
#: 323450	#: 323500	#: 323550	#: 323600	#: 323650	#: 323700	#: 323750	#: 323800	#: 323825
Wt.: 1,735#	Wt.: 1,870#	Wt.: 2,000#	Wt.: 2,135#	Wt.: 2,265#	Wt.: 2,400#	Wt.: 2,530#	Wt.: 2,665#	Wt.: 2,730#


NOTE: Item Numbers Listed for Items WITHOUT Added Base; Project Mgr to Indicate Ext. Base on W.O. and S.O.

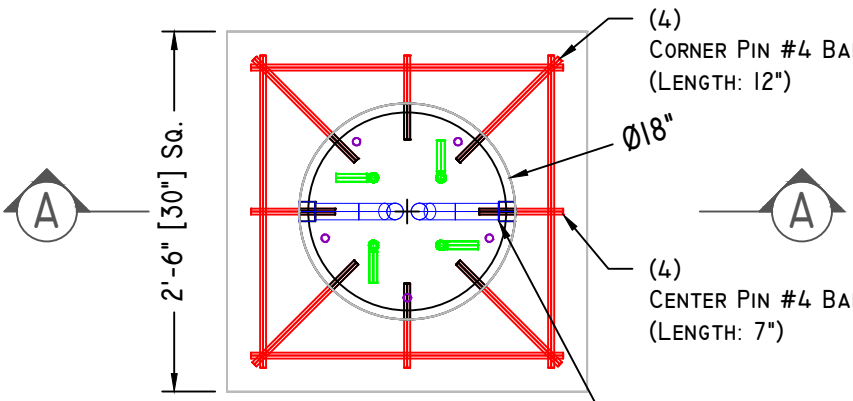

Plan View

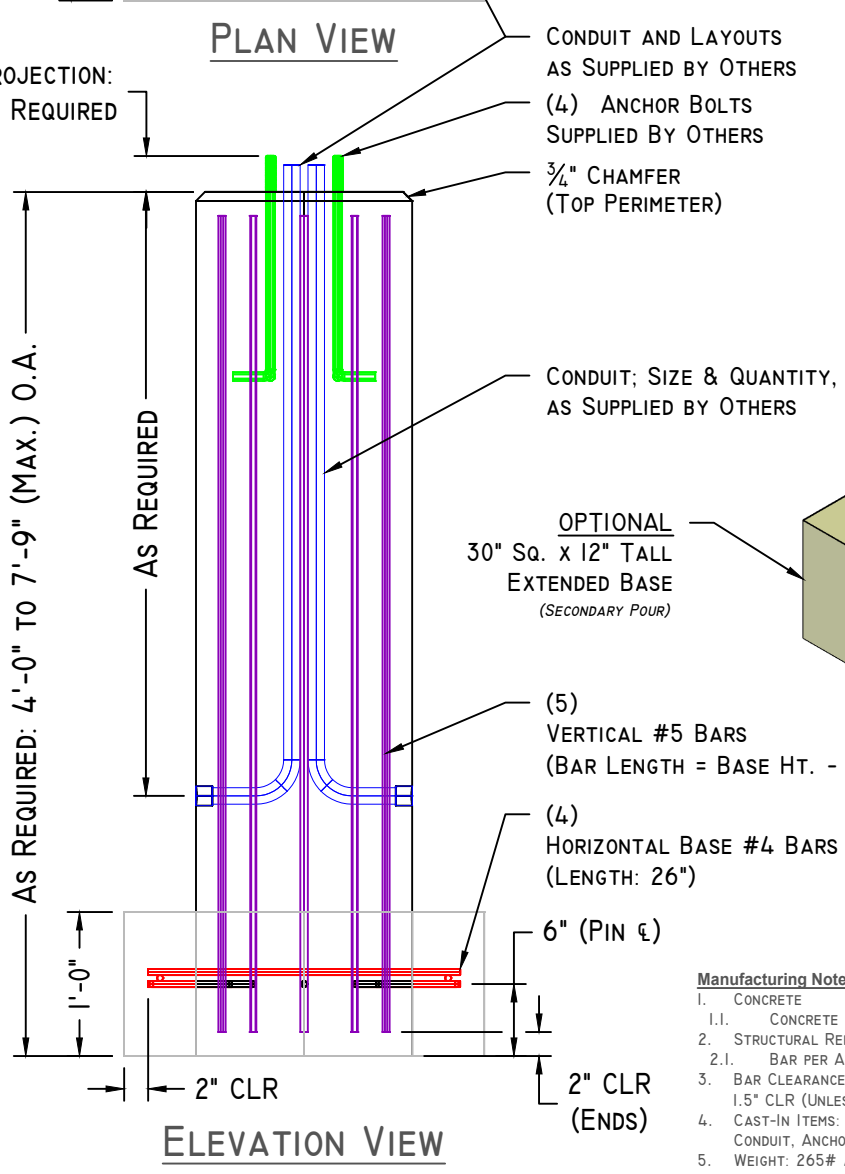

Elevation View

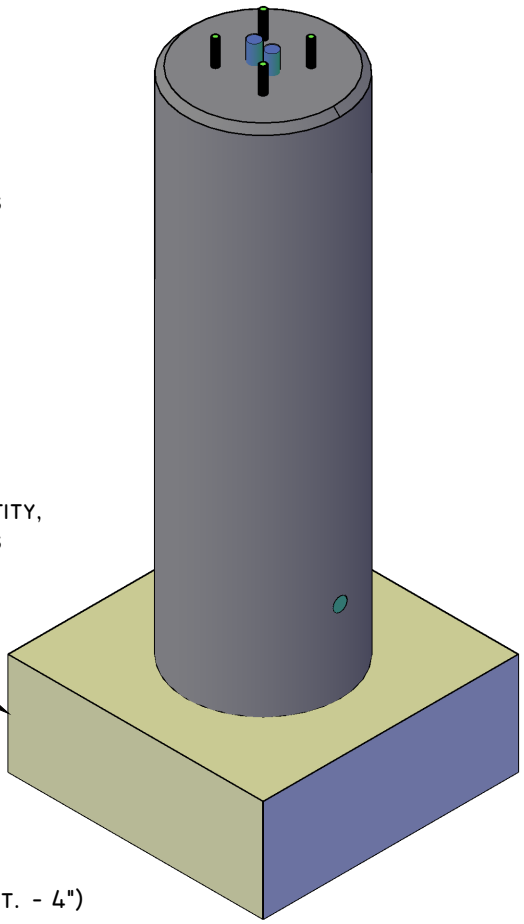

Conceptual View

Scale: NTS

Manufacturing Notes

1. Concrete
   - 1.1. Concrete Compressive Strength: 5,000psi, Air Entrainment: 4-6%
2. Structural Reinforcement:
   - 2.1. Bar per ASTM A615, Grade 60; Reinforcing Fibers @ 3 lbs/ Cu. Yd.
3. Bar Clearance / Protection:
   - 1.5" CLR (Unless otherwise noted)
4. Cast-In Items:
   - Conduit, Anchor Bolts & Bolt Pattern Template; to be Supplied by others.
5. Weight: 265# / V.F. Plus 675# for Added 30" Sq. Base

www.americanconcrete.com | Tel: 207-947-8334
1717 Stillwater Ave. Veazie, ME. 04401 | Fax: 866-414-9083

Scale: 3/4" = 1'-0" Unless otherwise noted | Revision #: 0.01 ABL

Drawn Date: 07/06/2012 | Revision Date: 04/29/22