
American Concrete Industries

4' x 6' Splice Box W/ 30"Ø Opening


ACI Catalog 2017

Electrical Utility | Item#: xxxxxx


BILL OF MATERIALS	
(1)	4'x6' Splice Box (Weight: 8,020 #)
(1)	4'x6' Splice Box Base (Weight: 2,210 #)
(12)	LUA44G Utility Lift Anchor
(6)	3/4" Threaded Insert

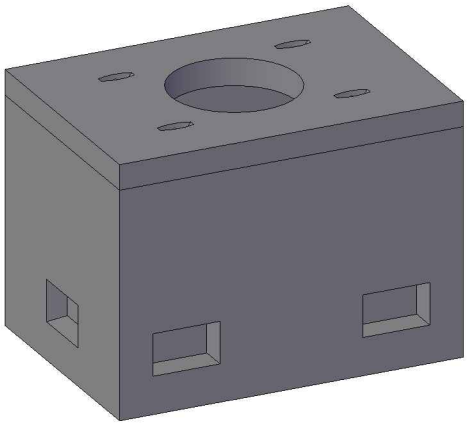

Conceptual View - NTS

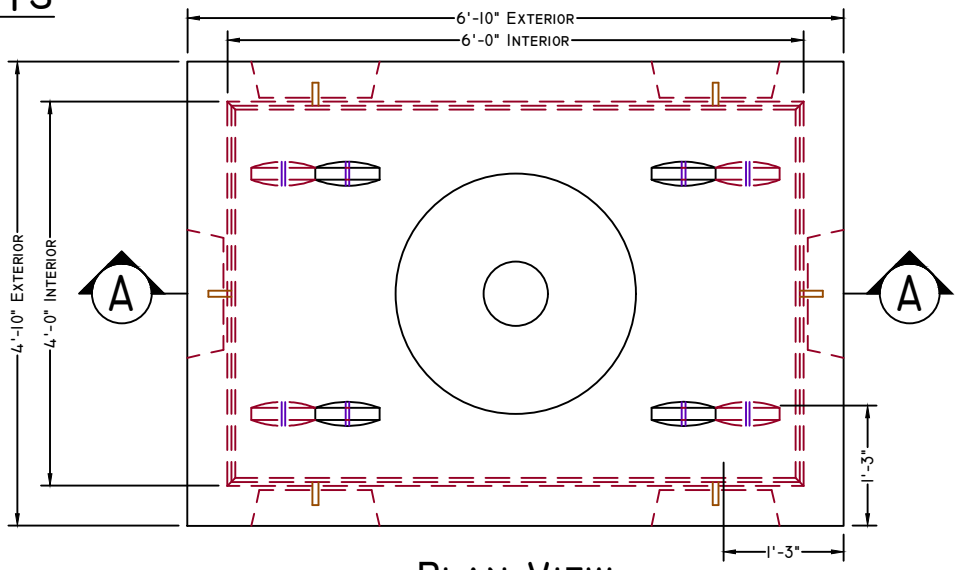

Plan View

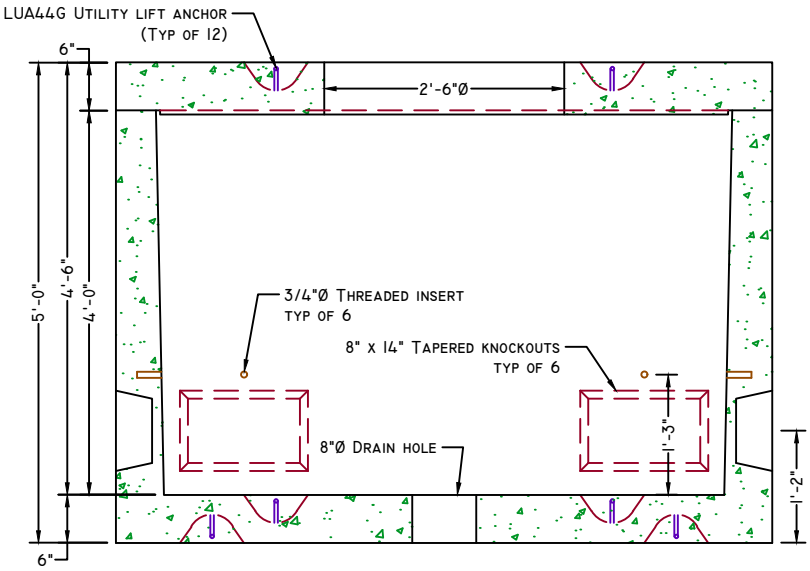

Section A-A

Design Notes:

1. **Concrete**
   - 1.1. Comp. strength min. 5,000psi @ 28 days
   - 1.2. Air-Entrainment: min. 5%-6%
2. **Structural Reinforcement:**
   - 2.1. Bar per ASTM A615, Grade 60
   - 2.2. Designed for H20 wheel load rating
3. **Bar Clearance / Protection:**
   - 3.1. Mat centered in top & walls; 1.5" CLR unless otherwise noted

www.americanconcrete.com

1717 Stillwater Ave.
Veazie, ME 04401
Tel: (207) 947-8334 | Fax: (207) 947-3580

1022 Minot Ave
Auburn, ME 04210
Tel: (207) 784-1388 | Fax: (207) 783-4039

Scale: 1/2" = 1'-0" Unless otherwise noted

Drawn Date: 03/14/2017 SSM

Revision #:

Revision Date: