

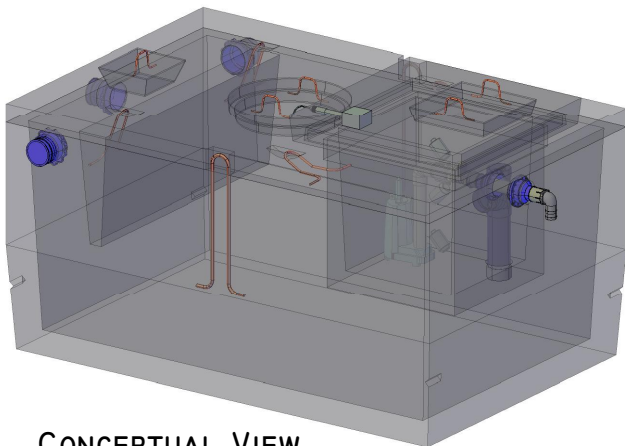


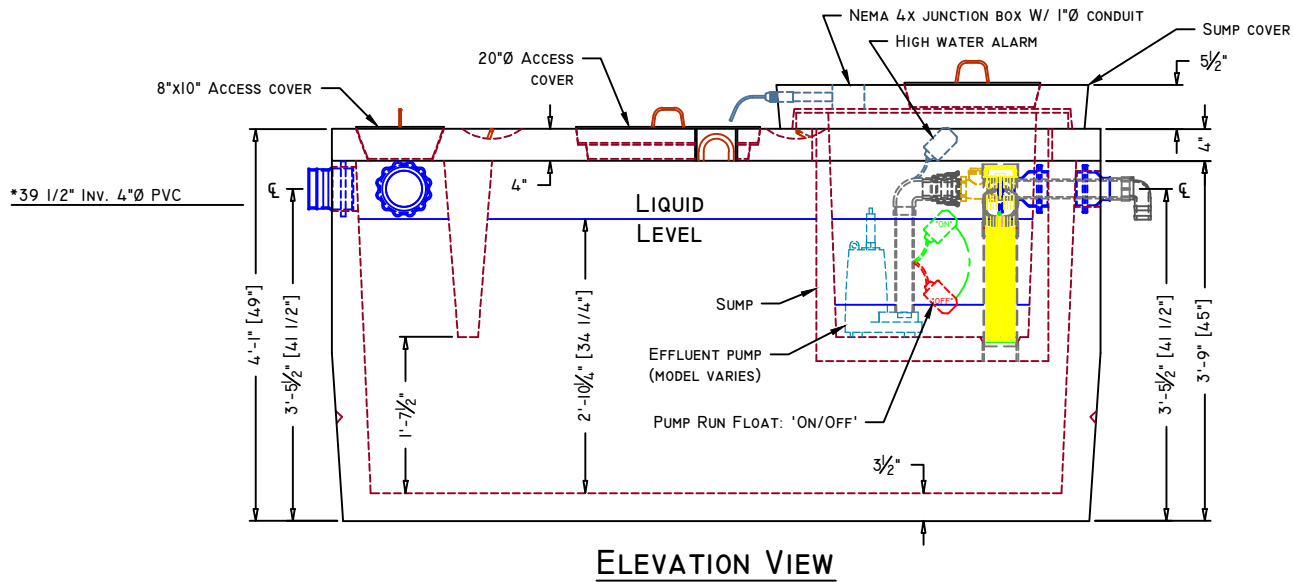

# American Concrete Industries

WWW.AMERICANCONCRETE.COM  
 1717 STILLWATER AVE.  
 VEAZIE, ME. 04401  
 TEL: (207) 947-8334  
 FAX: (207) 947-3580

## 750 GALLON LOWBOY LIFT STATION

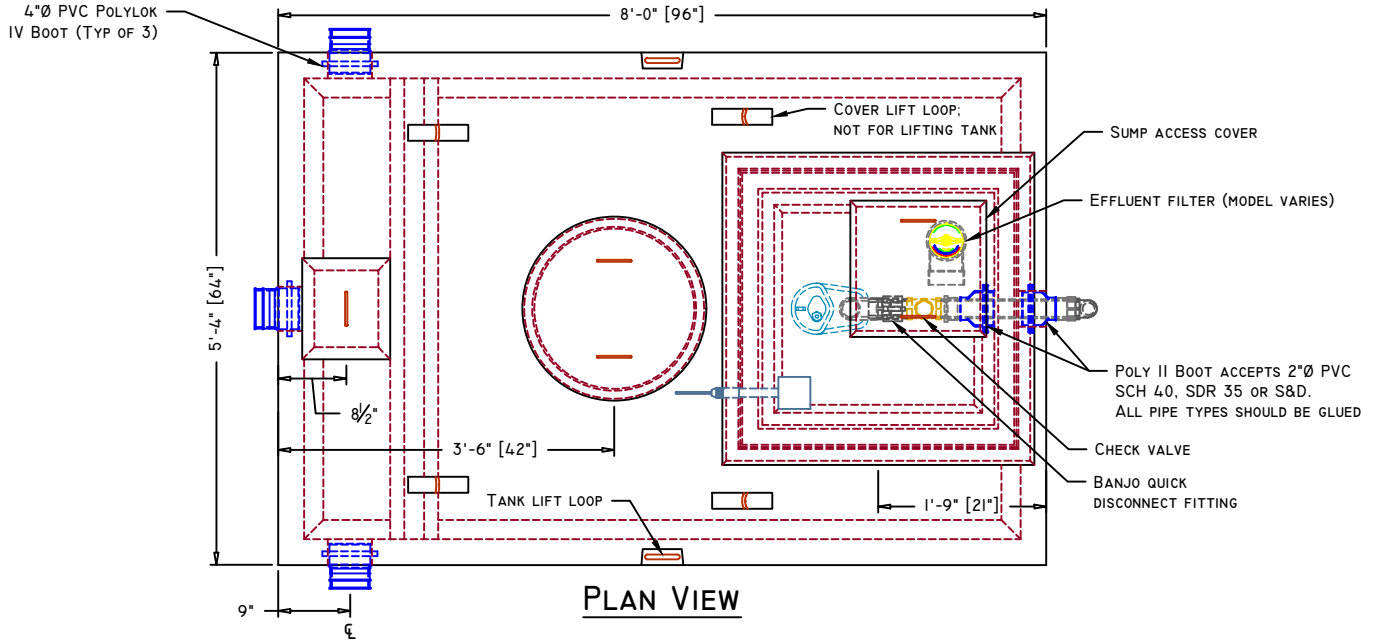

**CONCEPTUAL VIEW**

SCALE: NTS

\*Dimension is taken from bottom of tank

**Manufacturing Notes**

- I.1. CONCRETE COMPRESSIVE STRENGTH: 4000PSI @ 28 DAYS
- I.2. AIR ENTRAINMENT: 4-6%
- I.3. GRADE 60 REINFORCEMENT
- I.4. WWR & STRUCTURAL FIBER REINFORCED BASE
- I.5. TANKS SHOULD BE PUMPED EVERY 3-5 YEARS, DEPENDING ON USE
- I.6. NEVER USE SEPTIC CLEANING AGENTS
- I.7. DESIGNED FOR PEDESTRIAN LOAD RATING ONLY
- I.8. ALL TANK PENETRATIONS ARE INTEGRALLY CAST
- I.9. ALL JOINTS SEALED W/ BUTYL RUBBER JOINT SEALANT
- I.10. 'LIFT / PUSH / CORD LENGTH' INFORMATION REQUIRED AT TIME OF ORDERING
- I.11. APPROVAL REQUIRED FROM LOCAL CODE ENFORCEMENT AGENCIES, PRIOR TO USE

**Physical Specifications:**

Cover Weight:	2,260 lbs
Tank Weight:	5,740 lbs
Sump Weight:	795 lbs
Sump Cover Weight:	440 lbs
Total Weight:	9,235 lbs
Capacity:	733 gal (Invert In)
Working Capacity:	701 gal (Filter Invert)